



Project:

Item Number:

Quantity:

**238R, 217R, 217 SOFT SERVE PRESSURE-FED FLOOR MACHINES**



217



238R



**DESCRIPTION**

Slim, floor model soft serve ice cream freezers. Optional remote mix pump permits use of large capacity mix containers, keeping mix handling to a minimum. High capacity, space saving floor machines have a standard night switch to provide overnight refrigerated mix storage, saving energy and labor. Ideal for high volume operations.

238R can serve two flavors individually or combine them for a twist.

217R and 217 are single-flavor machines.

**ITEMS**

Item No.	Cooling	Phase
<input type="checkbox"/> 217-109G	Water	3
<input type="checkbox"/> 217-18G		1
<input type="checkbox"/> 217-309G	Air	3
<input type="checkbox"/> 217-38G		1
<input type="checkbox"/> 217R-109G	Water	3
<input type="checkbox"/> 217R-18G		1
<input type="checkbox"/> 217R-309G	Air	3
<input type="checkbox"/> 217R-38G		1
<input type="checkbox"/> 217R-409G	Air Remote	3
<input type="checkbox"/> 217R-48G		1
<input type="checkbox"/> 238R-109G	Water	3
<input type="checkbox"/> 238R-18G		1

**FEATURES**

- Delrin® food grade plastic blades provide quiet operation and superior durability.
- Clear door displays circulating product for merchandising appeal.
- Highly efficient auger design gently folds the entire contents of the freezing cylinder, delivering a thick, smooth, and creamy product.
- Compact floor unit design saves valuable floor space.

**OPTIONS AND ACCESSORIES**

- 219-02** Remote Pump (Piston Style)
- U3-02A** Remote Pump (Peristaltic Style)




Every machine includes Stoelting's White Glove Service. One call does it all – customer service, technical service, parts or warranty information, installation, startup, sales, on-site service dispatch and much more. Available 24 hours a day, seven days a week year-round.

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

Approvals	Date

## 238R, 217R, 217 SOFT SERVE PRESSURE-FED FLOOR MACHINES

### DIMENSIONS – IN (CM)

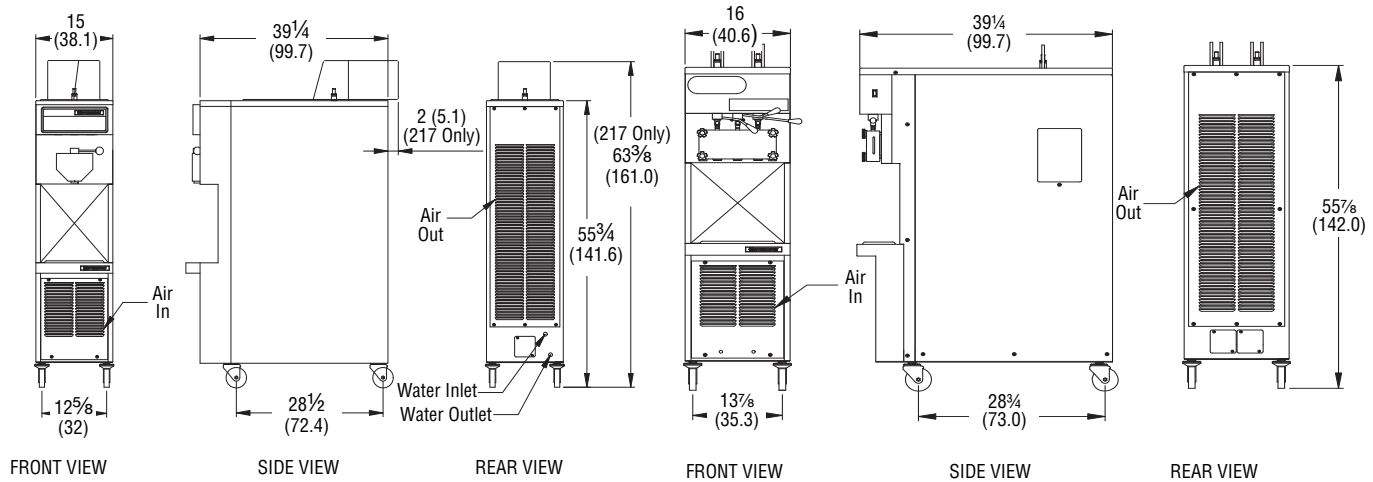

**217R and 217**

**238R**

### GENERAL SPECIFICATIONS

Machine	Freezing Cylinder			Hopper Capacity gallon (L)	Drive Motor (hp)
	Capacity gallon (L)	Compressor Btu/hr	Refrigerant		
217	1.33 (5.03)	14,000	R-404A	6.5 (24.6)	2
217R				Not Applicable	
238R	Two 1.33 (5.03)	Two 14,000		Not Applicable	Two 2

- Requires a dedicated electrical circuit.
- Electrical plug not included. Hardwired connection required.
- Maximum ambient temperature: 100°F (37.8 °C)
- Indoor use only.

### ITEM NUMBER SPECIFICATIONS

Item No.	Number of Flavors	Remote Mix Pump	Cooling	Phase	Volts	Minimum Circuit Ampacity (per barrel)	Maximum Overcurrent Protection Device Amps (per barrel)	Hz	Weight lb (kg)	Crated Weight lb (kg)
217-109G	1	—	Water	3	208-240	19	25	60	415 (188.2)	495 (224.5)
217-18G				1		26	35			
217-309G			Air	3		20	25			
217-38G				1		27	35			
217R-109G	1	✓	Water	3	208-240	18	25	60	385 (174.6)	495 (224.5)
217R-18G				1		25	35			
217R-309G			Air	3		19	25			
217R-38G				1		26	35			
217R-409G			Air Remote	3		18	25			
217R-48G				1		25	35			
238R-109G	2	✓	Water	3	208-240	18	25	60	560 (254)	654 (296.6)
238R-18G				1		25	35			

- **Air cooled units require:** Minimum clearance of 6" (15.2 cm) air space on all sides and open at the top.
- **Water cooled machines require:** Maximum water pressure of 130 psi. Minimum water flow rate of 3 GPM. Ideal EWT of 50°-70°F. Minimum clearance of 3"(7.62 cm).  
 -217 and 217R: 3/8" N.P.T. water and drain fittings.  
 -238R: 1/2" N.P.T. water and drain fittings.
- Remote mix pump machines require 1 pump per barrel and refrigerated mix transfer lines



**Service Information**  
 800-319-9549 (U.S. Toll Free)  
 920-894-2293 (Outside the U.S.)  
 www.stoeltingfoodservice.com  
 www.vollrath.com