



Project:

Item Number:

Quantity:

S0218B, S0328 HIGH CAPACITY FROZEN BEVERAGE DISPENSERS



S0218B



S0328



ITEMS

- S0218-18B One-Cylinder, Water-Cooled
- S0218-38B One-Cylinder, Air-Cooled
- S0328-38 Two-Cylinder, Air-Cooled

FEATURES

- Bottle racks with plastic bottles and pumps are included.
- Simplified design for quick assembly after cleaning.
- Automatic defrost cycle prevents large ice crystal formation to maintain consistent product.
- Fast dispense for quick fill of pitchers or controlled dispense for drinks by the glass.
- Efficient freezing cylinder and auger design delivers a consistent uniform product with small ice crystals and a quick recovery time.
- Single switch for simple operation and cleaning.

DESCRIPTION

High-capacity, gravity-fed floor model machines are equipped with fully-automatic controls to provide a uniform product. They operate with almost any type of frozen beverage mix.

The S0218 model includes a bottle rack kit with seven flavor dispensers.

The S0328 model has two large freezing cylinders for high volume dispensing and quick recovery, and has twice the capacity of the S0218 model. In addition, the S0328 model is adaptable to a bag-in-box or remote pre-mix autofill system and it makes thick, stackable slush for post mixing.

OPTIONS AND ACCESSORIES

- 2183807** Kit to Add Autofill Capability
- 2187101** Kit to Add Autofill Capability
- 2187905** Brix Autofill Kit (5 to 1 Ratio)
- 92203249** Brix Autofill Kit (3 to 1 Ratio)
- 417734** Fill-O-Matic II (Electric. Pumps up to 60 gallons per Hour)
- 4177370** Fill-O-Matic III (Gas. Pumps up to 45 gallons per Hour)
- 2187040** Bottle Rack Kit (Includes 10 Plastic Bottles and Pumps)
- 332003** Cup Dispenser (Adjustable 6-14 oz Cups)
- 332004** Cup Dispenser (Adjustable 12-24 oz Cups)




Every machine includes Stoelting's White Glove Service. One call does it all – customer service, technical service, parts or warranty information, installation, startup, sales, on-site service dispatch and much more. Available 24 hours a day, seven days a week year-round.

Continuous research leads to ongoing product improvements; therefore, these specifications are subject to change without notice and should not be used as installation specifications.

Approvals	Date

S0218B, S0328 HIGH CAPACITY FROZEN BEVERAGE DISPENSERS

DIMENSIONS

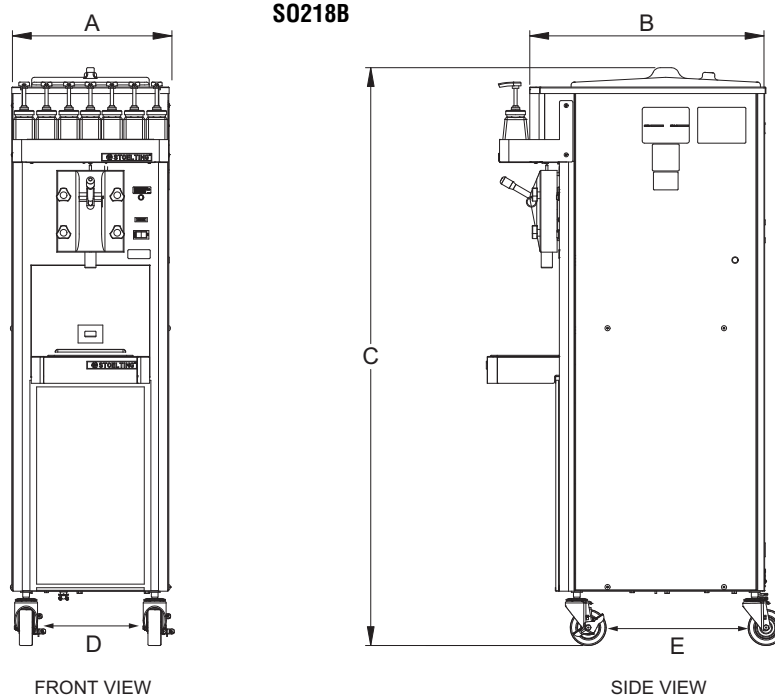

GENERAL SPECIFICATIONS

Machine	Freezing Cylinder			Drive Motor (hp)	Hopper Capacity gallon (L)	Dimensions – in (cm)					Weight lb (kg)	Crated Weight lb (kg)
	Capacity gallon (L)	Compressor Btu/hr	Refrigerant			(A) Width	(B) Depth	(C) Height	(D) Caster to Caster	(E) Caster to Caster		
S0218B	2 (7.57)	14,100	R-404A	1/2	7 (26.5)	17½ (44.5)	26¾ (67.0)	64½ (163.8)	14¾ (36.5)	19¾ (50.5)	315 (142.8)	420 (190.5)
S0328		Two 14,100		Two 1/2	Two 4.5 (17.0)	26 (66.0)	33½ (85.1)	60½ (153.6)	19¾ (49.8)	21¾ (55.6)	585 (265.8)	706 (320.1)

- Requires a dedicated electrical circuit.
- Power cord provided.
- Indoor use only.
- Maximum ambient temperature: 100°F (37.8 °C).

ITEM NUMBER SPECIFICATIONS

Item No.	Cooling	Phase	Volts	Hz	Running Amps	Plug
S0218B-18B	Water	1	208-240	60	12	NEMA 6-20P
S0218B-38B	Air					
S0328-38	Air					

- **Air cooled units require:** Minimum clearance of 3" (7.6 cm) air space at the front and back.
- **Water cooled units require:** ¾" N.P.T. water and drain fittings. Maximum water pressure of 130 psi. Minimum water flow rate of 3 GPM. Ideal EWT of 50°-70°F.



Service Information
 800-319-9549 (U.S. Toll Free)
 920-894-2293 (Outside the U.S.)
 www.stoeltingfoodservice.com
 www.vollrath.com